

Europäisches Patentamt  
European Patent Office  
Office européen des brevets

25-APP 306835.02  
ACCT#  
CITED REFERENCES



(11) EP 1 187 504 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:  
13.03.2002 Bulletin 2002/11

(51) Int Cl.7: H04Q 7/36

(21) Application number: 01000440.6

(22) Date of filing: 10.09.2001

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR  
Designated Extension States:  
AL LT LV MK RO SI

- Dabak, Anand G.  
Plano, TX 75025 (US)
- Nafie, Mohammed  
Richardson, TX 75081 (US)
- Gatherer, Alan  
Richardson, TX 75081 (US)

(30) Priority: 11.09.2000 US 231652 P  
25.07.2001 US 915091


(71) Applicant: Texas Instruments Inc.  
Dallas, Texas 75251 (US)

(74) Representative: Holt, Michael  
Texas Instruments Ltd.,  
EPD MS/13,  
800 Pavilion Drive  
Northampton Business Park,  
Northampton NN4 7YL (GB)

(72) Inventors:  
• Schmidl, Timothy M.  
Dallas, TX 75243 (US)

(54) Wireless communication channel selection using passive interference avoidance techniques

(57) A frequency band for use in wireless communication is selected by passively monitoring at least one of a plurality of available frequency bands (13) to determine whether the at least one frequency band is acceptable for a desired wireless communication. If the at least one frequency band is determined to be acceptable, it is then selected (19) for the desired wireless communication.

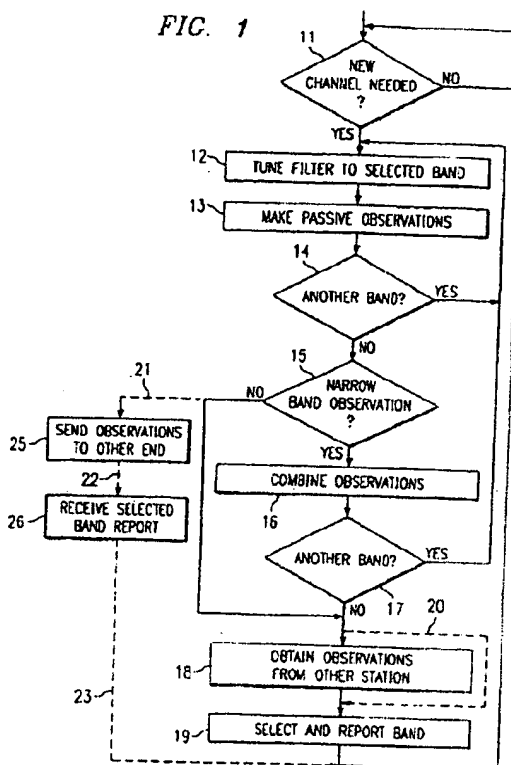

EP 1 187 504 A2

**Description****FIELD OF THE INVENTION**

[0001] The invention relates generally to wireless communications and, more particularly, to channel selection in wireless communications.

**BACKGROUND OF THE INVENTION**

[0002] Interference caused by overlapping frequency use is a common problem in wireless communications. For example, several different types of wireless communication systems operate within the 2.4 GHz ISM band. Examples of such systems include IEEE Std 802.11b systems, Bluetooth 1.0 systems and Bluetooth 2.0 systems. Thus, unless properly managed, wireless communications within one system can easily interfere with wireless communications within another system, thereby disadvantageously affecting the quality of communication in both systems.

[0003] Existing interference avoidance techniques are directed to situations wherein multiple users within a single wireless communication system share a common frequency channel. For example, IEEE Std 802.11b includes a clear channel assessment technique wherein a user who wishes to transmit on the common frequency channel first listens on that channel to determine whether another user is currently transmitting on the channel. If so, the listening user continues to listen to the channel until it determines that the other user has stopped transmitting, thereby making the channel available for the listening user. When this occurs, the listening user knows that it can begin transmission without causing interference to or receiving interference from another user. Although the clear channel assessment technique can be effective where multiple users are deliberately assigned to and knowingly share a common frequency channel, the technique would be much less effective if applied in situations wherein communications occurring within different multi-user wireless communication systems interfere with one another.

[0004] It is therefore desirable to provide for avoidance of interference between separate wireless communication systems that can operate in overlapping frequency ranges.

**SUMMARY OF THE INVENTION**

[0005] According to the invention, frequency bands are passively observed for channel quality/interference information, and a frequency band for transmission is selected based on the passive observations. This advantageously permits avoidance of unacceptable interferers from other wireless systems.

**BRIEF DESCRIPTION OF THE DRAWINGS**

[0006] The present invention will now be further described by way of example, with reference to the preferred and exemplary embodiments illustrated in the figures of the accompanying drawings in which:

FIGURE 1 illustrates exemplary frequency band selection operations.

FIGURE 2 diagrammatically illustrates pertinent portions of exemplary embodiments of a wireless communication station which can perform the operations of FIGURE 1.

FIGURE 3 diagrammatically illustrates exemplary embodiments of the band selection controller of FIGURE 2.

FIGURE 4 diagrammatically illustrates pertinent portions of exemplary embodiments of a wireless communication station which can perform the operations illustrated in FIGURE 1 and which reuses components from the wireless communications interface of FIGURE 2.

**DETAILED DESCRIPTION**

[0007] According to the invention, a selected wide band channel is passively monitored to obtain information about channel quality and/or interfering signals in that band. This can be done, for example, when a wireless communication station decides that a new channel should be selected for future communications. Such a decision can be made, for example, in response to observed poor channel quality associated with the channel that is currently being used, or in response to user selection of a communication application that requires relatively high quality transmission or a relatively high transmission rate, for example audio, video and multimedia applications. In some embodiments, wide band channels corresponding to possible interferers (for example known 802.11b 16-17 MHz channels) are passively monitored to determine whether or not the quality/interference levels in those bands are acceptable. In some embodiments, the transmission bandwidth (for example a 4-5 MHz Bluetooth 2.0 channel) in which transmission is desired can be passively monitored to determine channel quality/interference levels. In other embodiments, any desired combination of wide band channels of known interferers and desired transmission bandwidths can be passively monitored. In some embodiments, the passive monitoring is accomplished by making conventional RSSI (received signal strength indication) measurements at one or both ends of an existing wireless communication link. Different channel bandwidths can be used for the RSSI measurements, e.g. the 16-17 MHz of 802.11b and a 10 MHz channel width to avoid microwave oven interference.

[0008] When passive monitoring is performed at both ends of a communication link, the results obtained by

one end can be reported to the other end using any desired type of conventional wireless communication technique. For example, if the wireless communication link exists between two Bluetooth 1.0 devices, then the slave device can report its observations to the master device using a predetermined Bluetooth hopping sequence. Conversely, the master could report its observations to the slave in the same fashion. In some embodiments, each frequency in a wide band channel is assigned an index, and the communicating devices can report their observations to one another by reporting the indices associated with either the unacceptably interfered frequencies or the acceptably clear frequencies. For example, if a 16 MHz wide band channel associated with a possible interferer is found to be acceptably clear, and if transmission in a 4 MHz band is desired, then indices of 12 possible 4 MHz bands are reported. In some embodiments, these indices are repeatedly transmitted to the other end of the link for a predetermined number of transmissions. Any predetermined numbering scheme can be used to designate the various bands, and the numbers corresponding to either clear or interfered bands can be transmitted from one end to the other.

**[0009]** The following example illustrates an advantage of passively monitoring interference levels at both ends of a communication link. If a pair of communicating Bluetooth devices at opposite ends of a Bluetooth communication link passively monitor the wide band channels associated with an IEEE 802.11b system, it is possible to detect whether either of the Bluetooth devices is interfered with by an 802.11b device. This is advantageous because, due to geographical circumstances, it is possible for one end of a Bluetooth link to be interfered with by an 802.11b device while the other end of the Bluetooth link is substantially free of 802.11b interference.

**[0010]** In some embodiments, the passive monitoring can be applied to narrow band channels, such as the 1 MHz channels of Bluetooth 1.0 systems, and then several of these narrow band channel observations can be combined to obtain a resultant observation on a wider band channel, for example a 5 MHz channel of a Bluetooth 2.0 system.

**[0011]** After using passive monitoring techniques such as described above, an active probing technique can be used with respect to each available frequency of any wide band channels that the passive monitoring has identified as acceptable. An example of such an active probing technique is the probe, listen and select (PLS) technique described in co-pending US Serial Number 09/777,201, filed on February 5, 2001, incorporated herein by reference. In other embodiments, any desired frequency channel within an acceptable wide band channel can be chosen arbitrarily, without passively or actively monitoring that specific frequency individually.

**[0012]** FIGURE 1 illustrates exemplary operations which can be performed according to the invention. It is

determined at 11 whether a new wide band channel should be selected. This decision can be made, for example, in response to unacceptable communication quality in an existing wireless communication link between two devices, or in response to user selection of a communication application that requires, for example, a relatively high transmission quality or a relatively high transmission data rate (for example audio, video or multimedia applications). The decision at 11 can also be received from the other end of the link. When it is determined at 11 that a new channel should be selected, a filter is appropriately tuned to a frequency band that is to be passively monitored, for example a wide band channel associated with a known interfering system, a desired transmission bandwidth, or a narrow band channel that is to be observed in order to obtain channel quality/interference information about a wider band channel that includes the narrow band channel. After making the desired passive channel quality/interference observations (for example RSSI measurements) at 13, it is determined at 14 whether another band is to be observed. For example, the bands of all or only some possible interferers may be checked. If another band is to be observed, the filter is tuned to that band at 12, and corresponding passive channel quality/interference observations are made at 13. When it is determined at 14 that the passive observations have been made on all desired frequency bands, it is then determined at 14 whether the observed frequency bands are narrow bands from which a determination about a wider band is to be made. If not, then passive observations made at the other end of the link are obtained (as received from the other end) at 18, and a wide band channel (or channels) is selected (and reported to the other end of the link) at 19 based on the available passive observation information. Thereafter, operations return to 11.

**[0013]** The broken line 20 in FIGURE 1 illustrates embodiments wherein no observations are made at the other end of the link, and thus no observations are received at 18. In such embodiments, the wide band channel is selected at 19 based on the observations made at this end of the link.

**[0014]** The broken lines 21-23 in FIGURE 1 illustrate embodiments in which the device after the other end of the link makes the wide band selection. In such embodiments, the device at this end of the link simply transmits its observations to the other end at 25, and thereafter receives the selected wide band information at 26.

**[0015]** Returning to decision 15 in FIGURE 1, if it is determined that narrow band components were previously observed at 12-14, then the information observed with respect to all narrow band components is combined at 16 to produce a resultant wide band observation. For example, the energy from each of a plurality of narrow band RSSI measurements can be summed together at 16 to produce a resultant RSSI measurement for the corresponding wide band channel in which the observed narrow bands exist. Thereafter, as indicated at 17, the

operations illustrated at 12-16 are repeated until observations for all desired wide band channels have been obtained. Thereafter, operations proceed to 18, 19 or 25 as described above.

[0016] In some embodiments, the question at 11 can be answered "yes" periodically, even if no new channel is needed. In this way, known good channels will be immediately available when, for example, it is later determined at 11 that a new channel is actually needed.

[0017] FIGURE 2 diagrammatically illustrates pertinent portions of exemplary embodiments of a wireless communication station according to the invention which can perform the exemplary operations illustrated in FIGURE 1. The communication station of FIGURE 2, for example a Bluetooth communication station or an IEEE 802.11b communication station, includes an antenna assembly 24 for communicating with other communication stations via wireless communication frequency channels. A wireless communications interface 27 is coupled between the antenna 24 and one or more user communication applications 28. The wireless communications interface 27 can use well known conventional techniques for interfacing between the antenna 24 and the communication applications 28. A band selection controller 29 is coupled for bidirectional communication with the wireless communications interface 27.

[0018] A user input signal 30 that is used to select a communication application at 28 is also applied to the band selection controller 29, thereby permitting the band selection controller to determine whether another frequency band should be selected in view of the communication application selected by the user. The band selection controller 29 may also determine that another frequency band should be selected based on information conventionally produced by the wireless communications interface 27 indicative of the communication quality of a currently active frequency channel. The band selection controller 29 receives from the wireless communications interface 27 frequency channel signals received via the antenna 24. The band selection controller 29 performs the above-described passive monitoring technique to obtain channel quality/interference observations with respect to any selected wide band channel.

[0019] FIGURE 3 diagrammatically illustrates exemplary embodiments of the band selection controller of FIGURE 2. The input frequency channel signal 31 received from the wireless communications interface 27 is applied to a tunable filter 32 whose filter parameters are provided at 33 by a band selector 34. The band selector 34 responds to the user input 30 and/or the current channel quality information received at 35 from the wireless communications interface 27 to select a wide (or narrow) band channel for observation and tune the filter 32 appropriately to observe the selected channel. The filter 32 produces a suitably filtered output signal which is applied to an RSSI measurement portion (passive interference monitor) 36. The RSSI measurement portion

36 produces an RSSI measurement for any wide (or narrow) band channel selected by the band selector 34. The RSSI measurement information is provided at 37 to the band selector 34. In the case of narrow band RSSI measurements, the band selector 34 is operable to sum the energy in the narrow band measurements to produce a resultant wide band measurement.

[0020] After the RSSI measurements have been collected for all wide band channels selected by the band selector 34, these measurements (together with any measurements received at 35 from the other end of the link) are evaluated by the band selector 34 to determine which of the observed wide band channels is (are) preferred, for example which of the wide band channels is (are) least interfered. At 38, the band selector 34 provides to the wireless communications interface 27 information indicative of the preferred wide band channel, which information can then be forwarded across the existing frequency channel to the other end of the current wireless communication link.

[0021] In some embodiments, the band selector 34 receives at 35 from the wireless communications interface 27 a message from the other end of the link instructing the band selector 34 to make passive observations on certain wide band channels indicated in the message. In such embodiments, the band selector controls the filter 32 appropriately to obtain the desired RSSI measurements, and simply forwards these measurements at 38 to the wireless communications interface 27, which in turn forwards these measurements to the other end of the link. The station at the other end of the link uses the forwarded measurements to make its determination of the preferred wide band channel (or channels), and then transmits information indicative of the preferred wide band channel(s) to the wireless communications interface 27. At that point, the wireless communications interface 27 can switch to the preferred wide band channel.

[0022] In some embodiments, the band selection controller 29 of FIGURE 2 can re-use a filter and an RSSI measurement portion of the conventional wireless communications interface 27 of FIGURE 2. Such an exemplary embodiment is illustrated generally in FIGURE 4. In the embodiment of FIGURE 4, a filter 270 and an RSSI measurement portion 271 of the wireless communications interface 27 can be utilized by both the wireless communications interface 27 and a band selector 34A. The band selector 34A operates in generally the same fashion as the band selector 34 of FIGURE 3, but includes a control output 41 for controlling a selector 42 that selects either the wireless communications interface 27 or the band selector 34A for tuning the filter 270. In this fashion, the wireless communications interface 27 can use the filter 270 as it normally would to receive communications on various frequency channels, and the band selector 34A can also tune the filter 270 to any desired frequency band for purposes of passive interference monitoring. The output of filter 270 drives the

RSSI measurement portion 271, which produces an RSSI measurement output 44 that is used by both the band selector 34A and the wireless communications interface 27.

[0023] The band selector 34A is also coupled at 43 to receive from the wireless communications interface 27 (in various embodiments) current channel quality information, passive interference measurements made at and transmitted from the other end of the link, or wide band channel measurement instructions from at the other end of the link. Likewise at 43, the band selector 34A can provide to the wireless communications interface 27 information indicative of a preferred wide band channel (or channels), which the wireless communications interface 27 can then appropriately forward to the other end of the wireless communication link.

[0024] It will be evident to workers in the art that the exemplary embodiments of FIGURES 1-4 can be readily implemented by suitable modifications in software, hardware, or a combination of software and hardware, in conventional wireless communication stations such as, for example, Bluetooth 2.0 stations and IEEE 802.11b stations.

[0025] Although exemplary embodiments of the invention are described above in detail, this does not limit the scope of the invention, which can be practiced in a variety of embodiments.

#### Claims

1. A method of selecting a frequency band for use in a desired wireless communication from among a plurality of frequency bands available to be used for the desired wireless communication, comprising:

passively monitoring at least one of the available frequency bands to determine whether the at least one frequency band is acceptable for the desired wireless communication; and selecting the at least one frequency band for the desired wireless communication if the at least one frequency band is determined to be acceptable by said passive monitoring.

2. The method of Claim 1, wherein said passive monitoring step comprises:

monitoring communication quality associated with the at least one frequency band.

3. The method of Claim 1 or Claim 2, wherein said passive monitoring step comprises:

monitoring interference associated with the at least one frequency band.

4. The method of Claim 3, wherein said passive mon-

itoring step comprises:

making an RSSI measurement with respect to the at least one frequency band.

5. The method of any preceding Claim, wherein said passive monitoring step comprises:

passively monitoring a plurality of narrow frequency bands, and combining results of said passive monitoring of said narrow frequency bands to produce a wide band result corresponding to said at least one frequency band.

6. The method of any preceding Claim, wherein the at least one frequency band is an IEEE 802.11b band.

7. The method of any preceding Claim, wherein the at least one frequency band is a Bluetooth 2.0 band.

8. The method of any preceding Claim, wherein said passive monitoring step comprises:

each of two wireless communication stations passively monitoring at least some of said plurality of available frequency bands.

9. The method of Claim 8, further comprising:

one of said wireless communication stations communicating with the other of said wireless communication stations regarding results of said passive monitoring.

10. The method of any preceding Claim, wherein said passive monitoring step comprises:

passively monitoring a group of the available frequency bands, and tuning a filter to each of said group of available frequency bands.

11. The method of any preceding Claim, wherein the at least one frequency band is a frequency band associated with microwave oven interference.


12. The method of Claim 1, wherein said passive monitoring step comprises:

a wireless communication station passively monitoring a group of said available frequency bands, and said selecting step comprises the wireless communication station selecting the at least one frequency band for the desired wireless communication and informing another wireless communication station of the selected frequency band.

13. A wireless communication station, comprising:

- an antenna for use in wireless communications;  
 a band selection controller coupled to said antenna for selecting a frequency band for use in  
 a desired wireless communication from among  
 a plurality of frequency bands available to be  
 used for the desired wireless communication;  
 said band selection controller operable for passively monitoring at least one of the available  
 frequency bands to determine whether the at  
 least one frequency band is acceptable for the  
 desired wireless communication; and  
 said band selection controller further operable  
 for selecting the at least one frequency band  
 for the desired wireless communication if the at  
 least one frequency band is determined to be  
 acceptable.
14. The wireless communication station of Claim 13,  
 wherein said band selection controller comprises  
 an interference monitor for monitoring interference  
 associated with the at least one frequency band.
15. The wireless communication station of Claim 14,  
 wherein said interference monitor comprises an  
 RSSI measurement apparatus.
16. The wireless communication station of any of  
 Claims 13-15, comprising a wireless communica-  
 tions interface coupled between said antenna and  
 said band selection controller, said wireless com-  
 munications interface cooperable with said band  
 selection controller and said antenna for communi-  
 cating to another wireless communication station  
 information indicative of a result of said passive  
 monitoring operation.
17. The wireless communication station of any of  
 Claims 13-15, comprising a wireless communica-  
 tions interface coupled between said antenna and  
 said band selection controller, said wireless com-  
 munications interface cooperable with said antenna  
 for receiving and providing to said band selection  
 controller a passive monitoring result which is as-  
 sociated with the at least one frequency band and  
 which has been obtained and transmitted by another  
 wireless communication station, said band selec-  
 tion controller operable for determining whether the  
 at least one frequency band is acceptable for the  
 desired wireless communication in response to said  
 result received from said another wireless commu-  
 nication station.
18. The wireless communication station of Claim 13,  
 wherein said band selection controller comprises a  
 filter coupled to said antenna for tuning to each of  
 a group of the available frequency bands, said band  
 selection controller including a passive monitor cou-  
 pled to said filter for passively monitoring each of
- said group of available frequency bands.
19. The wireless communication station of any of  
 Claims 13-15, comprising a wireless communica-  
 tions interface coupled to said antenna for interfacing  
 between said antenna and a communications  
 application, said band selection controller including  
 a portion of said wireless communications interface.
20. The wireless communication station of Claim 19,  
 wherein said portion of said wireless communica-  
 tions interface comprises a filter for tuning to the at  
 least one frequency band and an RSSI measure-  
 ment apparatus coupled to said filter for providing  
 an RSSI measurement with respect to the at least  
 one frequency band.
21. The wireless communication station of any of  
 Claims 13-20, provided as one of a Bluetooth sta-  
 tion and an IEEE 802.11b station.

FIG. 1

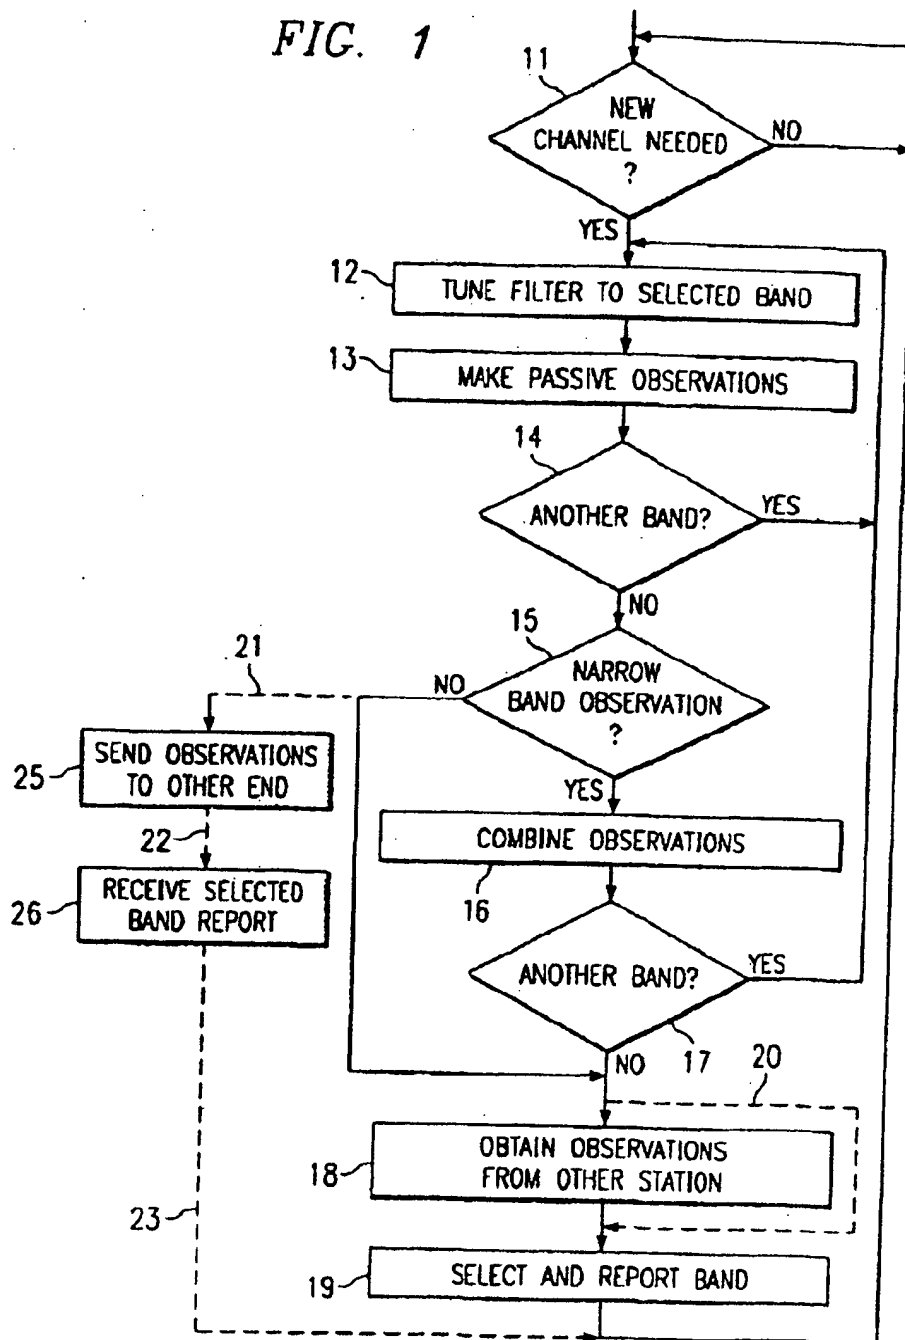

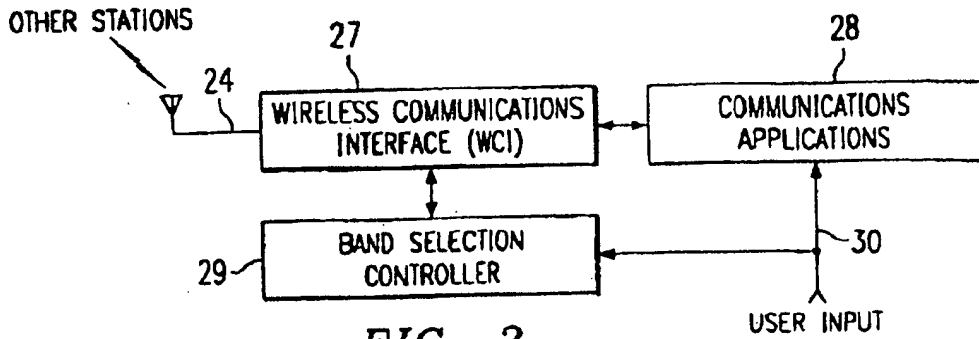


FIG. 2

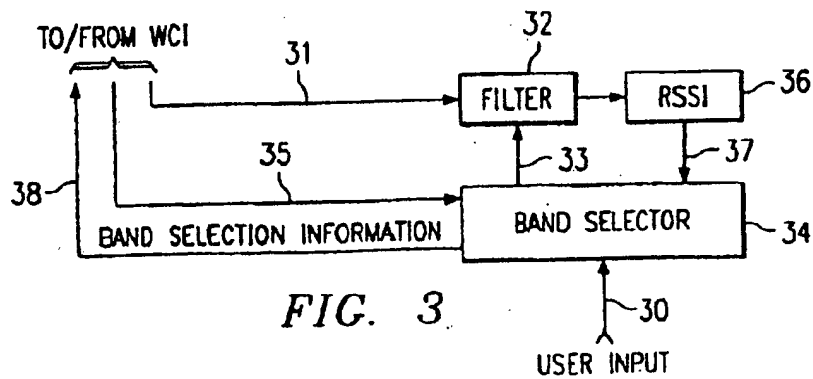


FIG. 3


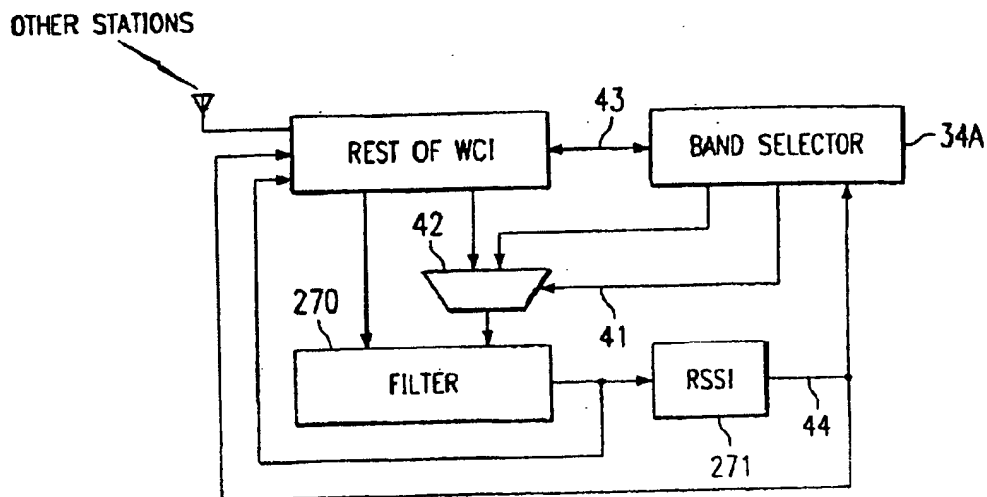


FIG. 4





Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 187 504 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
02.07.2003 Bulletin 2003/27

(51) Int Cl.7: **H04Q 7/36**, H04L 12/56,  
H04L 12/28

(43) Date of publication A2:  
13.03.2002 Bulletin 2002/11

(21) Application number: 01000440.6

(22) Date of filing: 10.09.2001

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

• Dabak, Anand G.  
Plano, TX 75025 (US)  
• Nafie, Mohammed  
Richardson, TX 75081 (US)  
• Gatherer, Alan  
Richardson, TX 75081 (US)

(30) Priority: 11.09.2000 US 231652 P  
25.07.2001 US 915091


(71) Applicant: Texas Instruments Inc.  
Dallas, Texas 75251 (US)

(74) Representative: Holt, Michael  
Texas Instruments Ltd.,  
EPD MS/13,  
800 Pavilion Drive  
Northampton Business Park,  
Northampton NN4 7YL (GB)

(72) Inventors:  
• Schmidt, Timothy M.  
Dallas, TX 75243 (US)

(54) **Wireless communication channel selection using passive interference avoidance techniques**

(57) A frequency band for use in wireless communication is selected by passively monitoring at least one of a plurality of available frequency bands (13) to determine whether the at least one frequency band is acceptable for a desired wireless communication. If the at least one frequency band is determined to be acceptable, it is then selected (19) for the desired wireless communication.

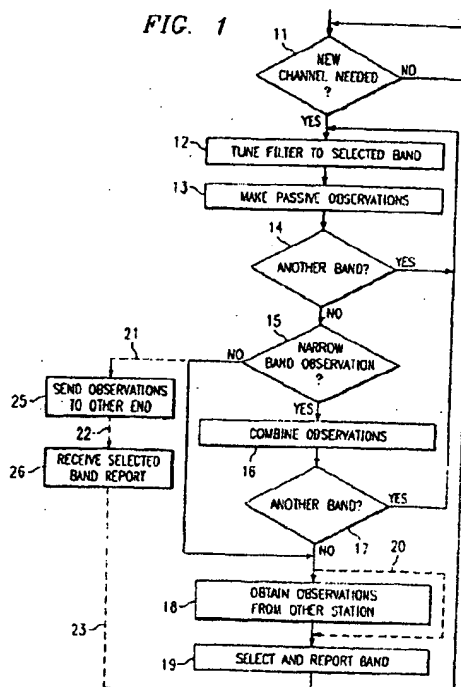

EP 1 187 504 A3



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 01 00 0440

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 716 514 A (ERICSSON BUSINESS MOBILE NETWO) 12 June 1996 (1996-06-12)	1-5, 8-10, 12-16	H04Q7/36 H04L12/56 H04L12/28
Y	* column 2, line 54 - column 3, line 21 *  * column 4, line 17 - column 5, line 33 * * column 6, line 28 - column 7, line 25 * * column 8, line 53 - column 10, line 9 * * column 10, line 21 - column 11, line 8 * * column 12, line 40 - line 44 * * column 14, line 36 - column 15, line 37 *  * column 16, line 5 - line 23 * * figures 2,7,11,13 * ---	6,7,11, 17-21	
Y	"Broadband Radio Access Networks (BRAN);HIPERLAN Type 2; System Overview" ETSI TR 101 683 V1.1.1, XX, XX, 8 February 2000 (2000-02-08), pages 1-20, XP002176358 * page 16, paragraph 6.3.2.2 - page 17, paragraph 6.3.2.3 * ---	6,7,11, 17-21	
P,X	WO 01 31942 A (MOTOROLA INC) 3 May 2001 (2001-05-03) * abstract * * page 1, line 9 - line 30 * * figures 1,2 * * page 2, line 13 - page 3, line 13 * * page 5, line 15 - line 25 * --- -/--	1,13	
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 30 April 2003	Examiner Rosenauer, H
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document</p> <p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date O: document cited in the application L: document cited for other reasons &amp;: member of the same patent family, corresponding document</p>			

EPO FORM 1503 (3.8.02) (P.04/01)



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 01 00 0440

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X A	US 6 047 175 A (TROMPOWER MICHAEL L) 4 April 2000 (2000-04-04)  * column 2, line 51 - column 3, line 33 * * column 4, line 57 - column 5, line 22 * * column 5, line 53 - column 7, line 17 * * column 11, line 45 - column 12, line 6 * * column 20, line 21 - column 21, line 45 *  * figures 1,2,4,7,8,11 * -----	1,13  2-12, 14-21	
A	DE 196 51 709 A (ALTVATER AIR DATA SYSTEMS GMBH) 25 June 1998 (1998-06-25) * abstract * -----	1-21	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search <b>MUNICH</b>		Date of completion of the search <b>30 April 2003</b>	Examiner <b>Rosenauer, H</b>
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EP-C1-Form 1303 (03.05.99) (P04C21)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 00 0440

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

30-04-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0716514	A	12-06-1996	EP 0716514 A1	12-06-1996
			AU 717786 B2	30-03-2000
			AU 4025195 A	13-06-1996
			CA 2164528 A1	08-06-1996
			DE 69432306 D1	24-04-2003
			FI 955852 A	08-06-1996
			JP 8237726 A	13-09-1996
			US 5907812 A	25-05-1999
WO 0131942	A	03-05-2001	US 6327300 B1	04-12-2001
			CN 1382349 T	27-11-2002
			EP 1228651 A1	07-08-2002
			WO 0131942 A1	03-05-2001
			US 2002009158 A1	24-01-2002
US 6047175	A	04-04-2000	US 6215982 B1	10-04-2001
DE 19651709	A	25-06-1998	DE 19651709 A1	25-06-1998
			AU 5855398 A	03-07-1998
			WO 9826516 A1	18-06-1998
			EP 0806842 A1	12-11-1997

EPO FORM P/0419

For more details about this annex: see Official Journal of the European Patent Office, No. 12/82